

BJELIN


Vista Oak



GRADING: Multi-Strip



Hardwood From The
Spačva Forest In Croatia

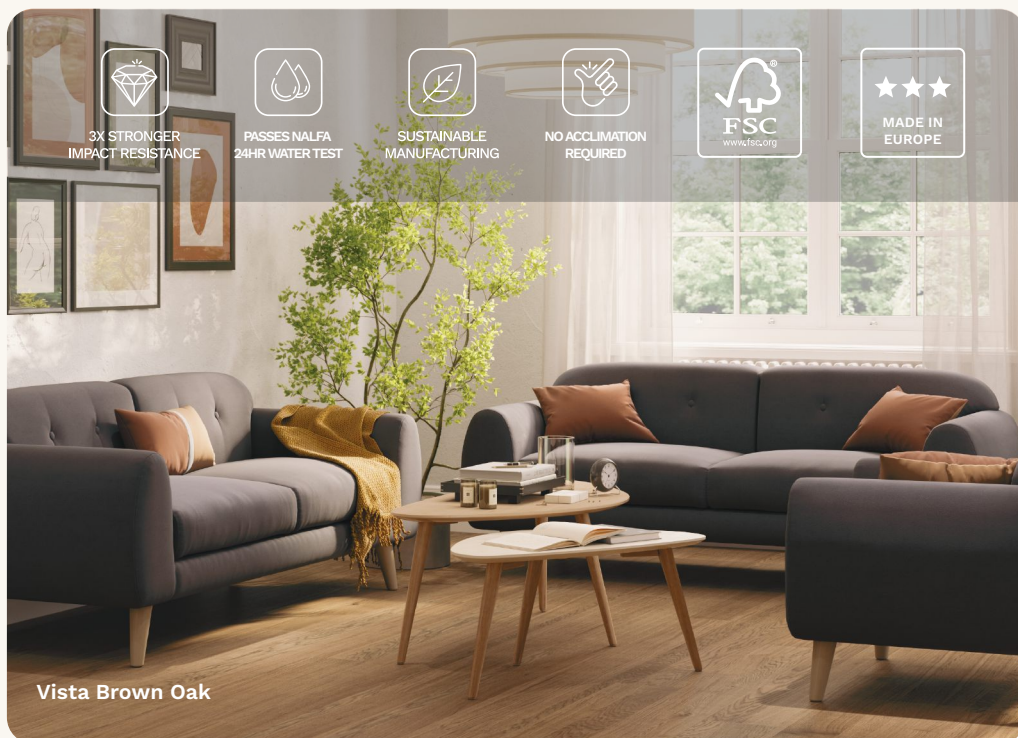

Vista White Oak

Vista Natural Oak

Vista Brown Oak

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 3

WOOD TYPE European White Oak

DIMENSIONS 7.9" x 79.9" x 9.2mm

TYPE OF FLOORING Hardened wood

GRADING Multi-Strip

BEVEL Long and short side

CORE Välinge Compositек core

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Smooth Finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 6

AREA PER PACKAGE 26.22 sqft

WEIGHT OF PACKAGE 48.28 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.075 (m² x K)/W
BRINELL HARDNESS	EN 1534	8 HB (mv)
IMPACT RESISTANCE	EN 14354	EC2
THICKNESS SWELLING	EN 14354	<10%
WEAR RESISTANCE	EN 14354	>2000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM EN ISO 10140-3 18-20 dB
EN ISO 717-2

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS 1 Point



800.492.8722
UrbanSurfaces.com

BJELIN

XL Oak




GRADING: Nature



GRADING: Select



Hardwood From The
Spačva Forest In Croatia

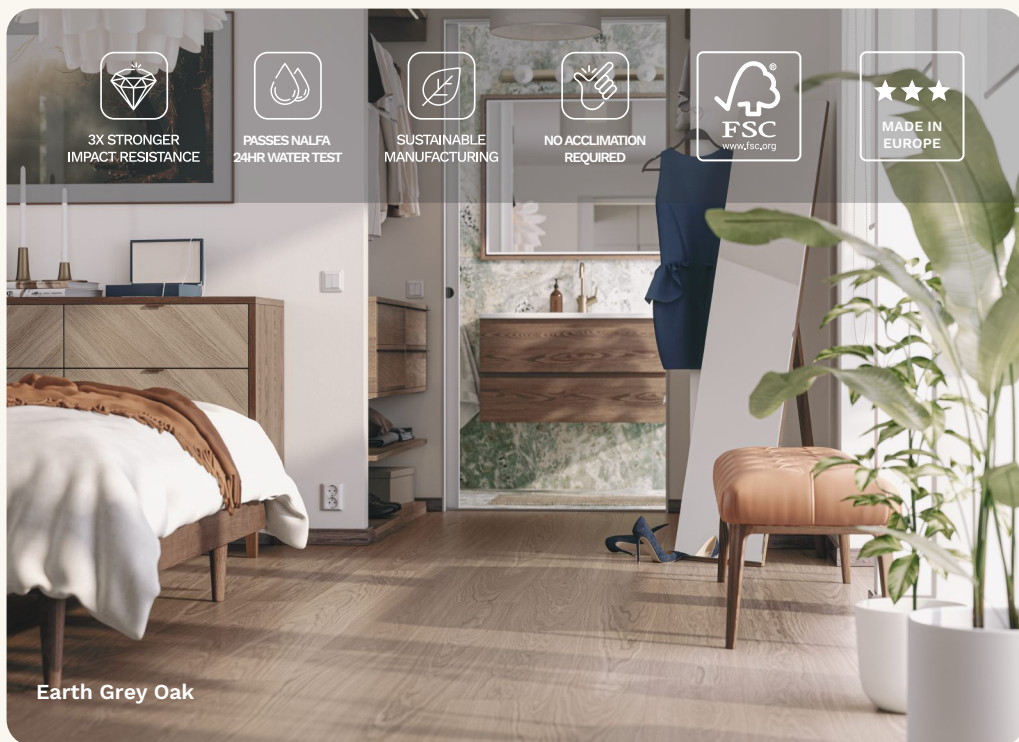

Powder White Oak

Misty White Oak

Natural Oak

Earth Grey Oak

Terra Brown Oak

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 5

WOOD TYPE European White Oak

DIMENSIONS 8.1" x 86.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Nature

BEVEL Micro Bevel

CORE Välinge Compositiek core

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Brushed finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 4

AREA PER PACKAGE 19.51 sqft

WEIGHT OF PACKAGE 43.87 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.07 (m2 x K)/W
BRINELL HARDNESS	EN 1534	10 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<8%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM EN ISO 10140-3 18-20 dB
EN ISO 717-2

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS 1 Point



800.492.8722
UrbanSurfaces.com

BJELIN

XXL Oak




GRADING: Nature



GRADING: Select



Hardwood From The
Spačva Forest In Croatia

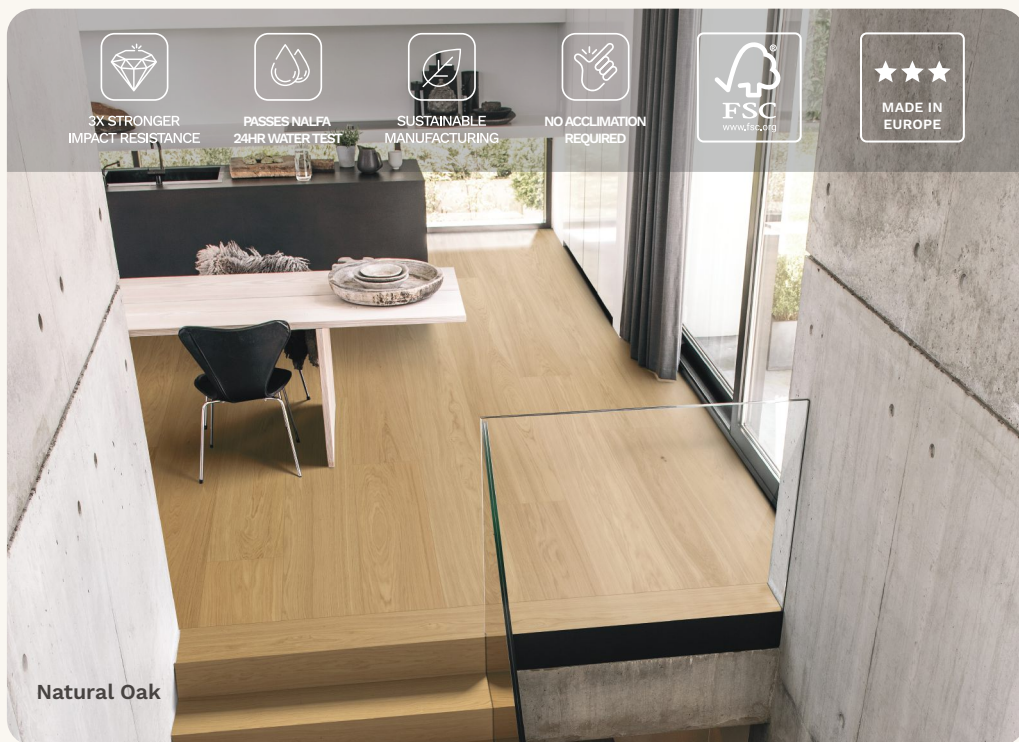

Natural Oak

Powder White Oak

Misty White Oak

Natural Oak

Earth Grey Oak

Terra Brown Oak

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 5

WOOD TYPE European White Oak

DIMENSIONS 10.7" x 93.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Nature

BEVEL Micro Bevel

CORE Välinge Compositiek core

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Brushed finish

TRANSITIONS Install 82 ft in any direction
without transitions

PACKAGING

PLANKS PER PACKAGE 3

AREA PER PACKAGE 20.81 sqft

WEIGHT OF PACKAGE 47.78 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.07 (m2 x K)/W
BRINELL HARDNESS	EN 1534	10 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<8%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM EN ISO 10140-3 18-20 dB
EN ISO 717-2

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

**LEED V4 MR CREDIT:
ENVIRONMENTAL
PRODUCT DECLARATIONS** 1 Point



800.492.8722
UrbanSurfaces.com

BJELIN


XL Ash



GRADING: Select



European Hardwood

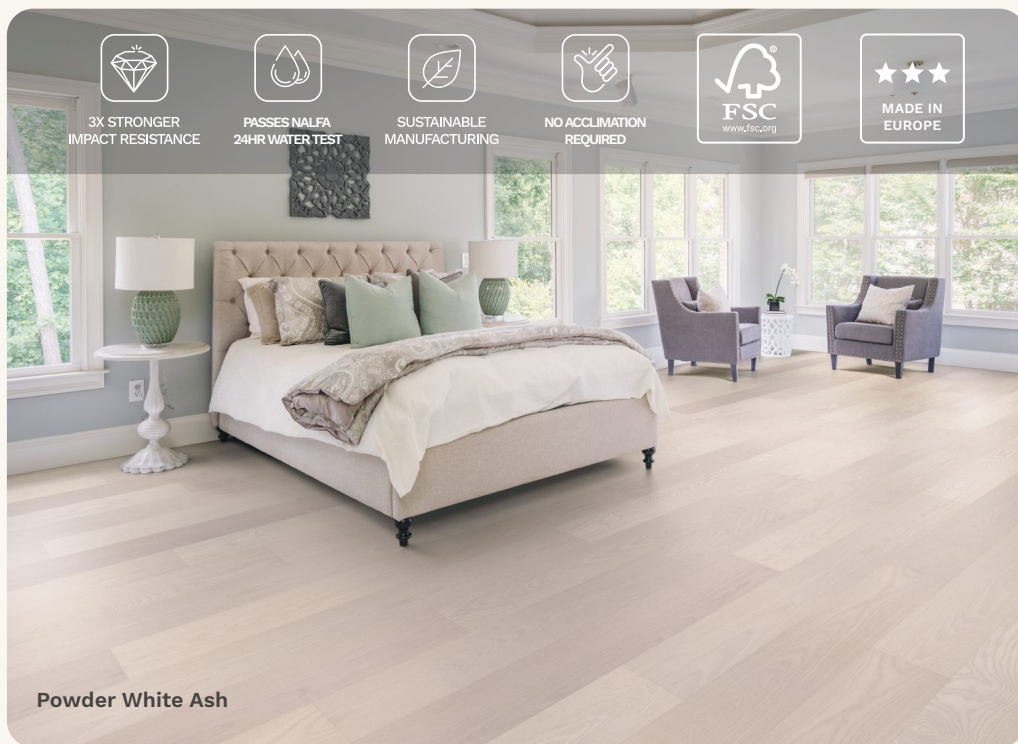

Powder White Ash

Earth Grey Ash

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 2

WOOD TYPE European Ash

DIMENSIONS 8.1" x 86.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Select

BEVEL Micro Bevel

CORE Välinge Compositenkern

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Smooth finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 4

AREA PER PACKAGE 19.51 sqft

WEIGHT OF PACKAGE 43.87 lbs

CLASSIFICATION

SMOKE DENSITY

Classification

Result

CRITICAL RADIANT FLUX

THERMAL CONDUCTIVITY

FORMALDEHYDE

SLIP RESISTANCE

THERMAL RESISTANCE

BRINELL HARDNESS

IMPACT RESISTANCE

THICKNESS SWELLING

WEAR RESISTANCE

SLIP RESISTANCE

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM

ASTM E662

ASTM E648

ASTM C518

ASTM D6007

A137.1/A326.3

EN 12667

EN 1534

EN 14354

EN 14354

EN 14354

EN 14342:2013

EN ISO 10140-3
EN ISO 717-2

Passes

Class 1

1.2472 Vlu in/h ft2 F

Passes

Wet: 0.73

0.07 (m2 x K)/W

10 HB (mv)

EC3

<8%

>6000 cycles*

EU: With slider 55: 66

GB: With slider 96: 62

18-20 dB

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS

1 Point

LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS

1 Point

LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS

1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS

1 Point



woodura®
PATENTED SURFACE TECHNOLOGY



800.492.8722
UrbanSurfaces.com

BJELIN



XL Walnut




GRADING: Nature



American Walnut

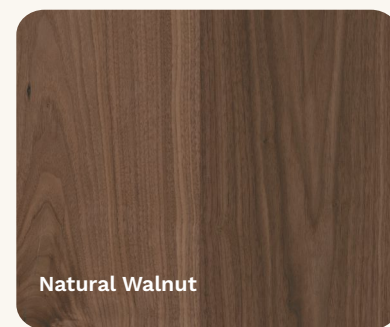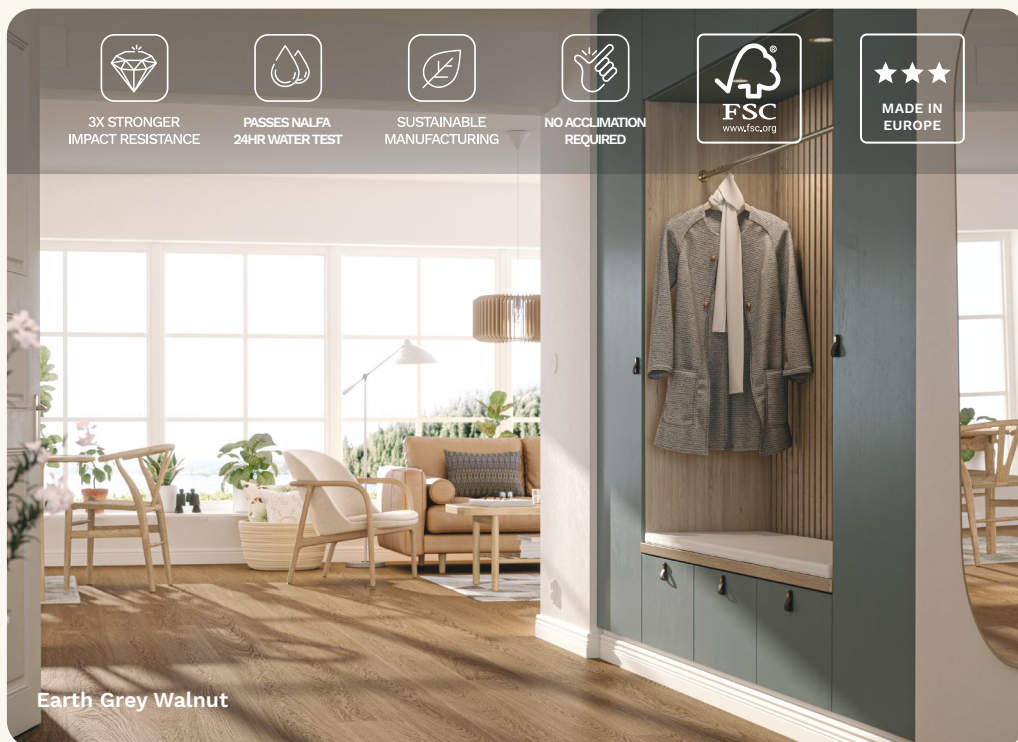

Natural Walnut

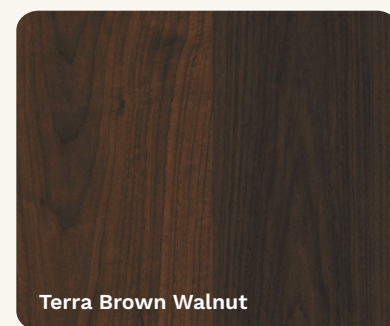

Terra Brown Walnut

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 2

WOOD TYPE American Walnut

DIMENSIONS 8.1" x 86.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Nature

BEVEL Micro Bevel

CORE Välinge Compositenkern

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Smooth finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 4

AREA PER PACKAGE 19.51 sqft

WEIGHT OF PACKAGE 43.87 lbs

CLASSIFICATION

SMOKE DENSITY

Classification

Result

CRITICAL RADIANT FLUX

ASTM E648

Passes

THERMAL CONDUCTIVITY

ASTM C518

Class 1

FORMALDEHYDE

ASTM D6007

1.2472 Vlu in/h ft2 F

SLIP RESISTANCE

A137.1/A326.3

Passes

THERMAL RESISTANCE

EN 12667

Wet: 0.73

BRINELL HARDNESS

EN 1534

0.07 (m2 x K)/W

IMPACT RESISTANCE

EN 14354

10 HB (mv)

THICKNESS SWELLING

EN 14354

EC3

WEAR RESISTANCE

EN 14354

<8%

SLIP RESISTANCE

EN 14342:2013

>6000 cycles*

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM

EN ISO 10140-3
EN ISO 717-2

EU: With slider 55: 66
GB: With slider 96: 62

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS

1 Point

LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS

1 Point

LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS

1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS

1 Point



woodura®
PATENTED SURFACE TECHNOLOGY



800.492.8722
UrbanSurfaces.com

BJELIN


XXL Ash



GRADING: Select



European Hardwood

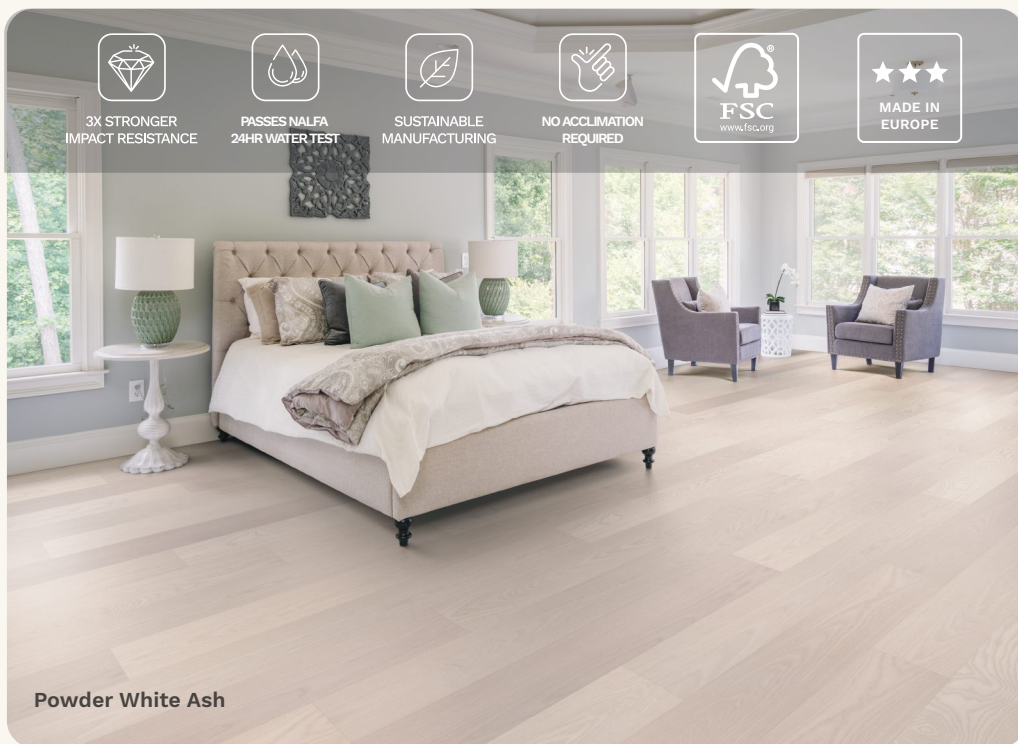

Powder White Ash



Earth Grey Ash

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 2

WOOD TYPE European Ash

DIMENSIONS 10.7" x 93.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Select

BEVEL Micro Bevel

CORE Valinge Compositenkern

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Smooth finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 3

AREA PER PACKAGE 20.81 sqft

WEIGHT OF PACKAGE 47.78 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.07 (m2 x K)/W
BRINELL HARDNESS	EN 1534	10 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<8%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM

EN ISO 10140-3
EN ISO 717-2

18-20 dB

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS

1 Point



800.492.8722
UrbanSurfaces.com

BJELIN


Large Oak



GRADING: Blend



Hardwood From The
Spačva Forest In Croatia

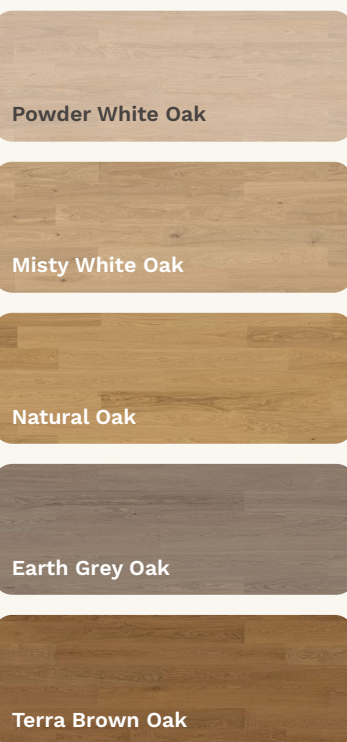

PRODUCT DETAILS

PRODUCT	Woodura Planks 3.0
STAINING COLORS	5
WOOD TYPE	European White Oak
DIMENSIONS	7.09" x 78.74" x 9.2mm
TYPE OF FLOORING	Hardened wood
GRADING	Nature
BEVEL	Micro Bevel
CORE	Välinge Compositiek core
VENEER THICKNESS	0.6mm
SURFACE TREATMENT	UV cured acrylic
SURFACE TEXTURE	Brushed finish
TRANSITIONS	Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE	7
AREA PER PACKAGE	27.125 sqft
WEIGHT OF PACKAGE	50.08lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.075 (m² x K)/W
BRINELL HARDNESS	EN 1534	8 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<10%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM	EN ISO 10140-3 EN ISO 717-2	18-20 dB
--	--------------------------------	----------

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS
1 Point



800.492.8722
UrbanSurfaces.com

BJELIN

Herringbone Oak



GRADING: Select



Hardwood From The
Spačva Forest In Croatia



3X STRONGER
IMPACT RESISTANCE




PASSES NALFA
24HR WATER TEST




SUSTAINABLE
MANUFACTURING




NO ACCLIMATION
REQUIRED

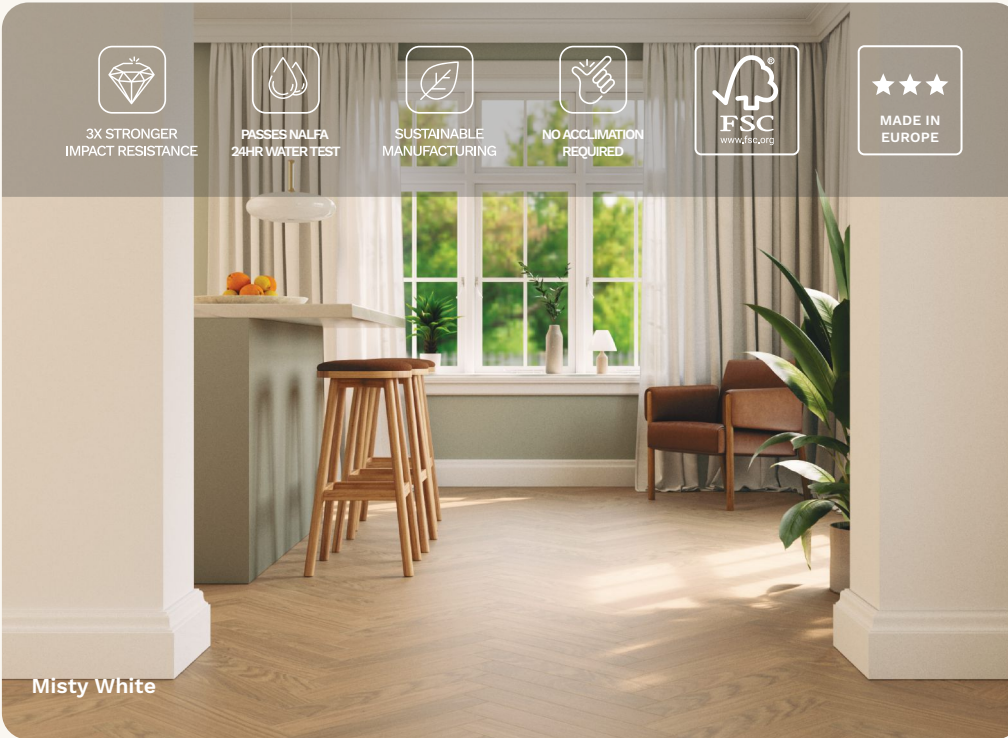


Misty White

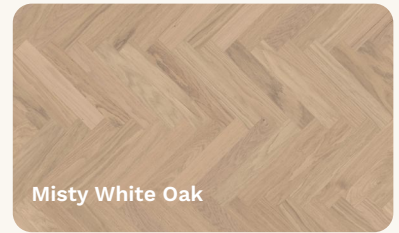

Misty White Oak

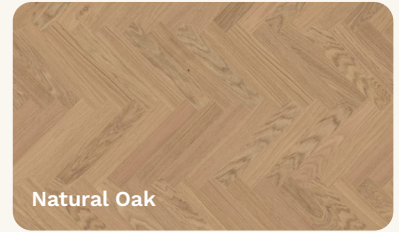

Natural Oak

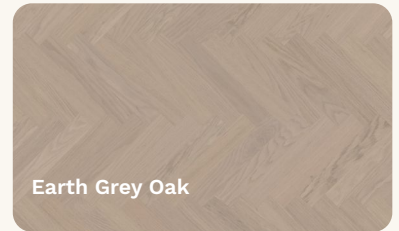

Earth Grey Oak

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 3

WOOD TYPE European White Oak

DIMENSIONS 3.58" x 21.49" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Select

BEVEL Micro Bevel

CORE Välinge Compositex core

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Brushed finish

TRANSITIONS Install 82 ft in any direction
without transitions

PACKAGING

PLANKS PER PACKAGE 22

AREA PER PACKAGE 11.73 sqft

WEIGHT OF PACKAGE 26.5 lbs

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.075 (m² x K)/W
BRINELL HARDNESS	EN 1534	8 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<10%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

**STEP SOUND REDUCTION WHEN
USING 2MM UNDERLAY FOAM**

EN ISO 10140-3
EN ISO 717-2

18-20 dB

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

**LEED V4 MR CREDIT:
ENVIRONMENTAL
PRODUCT DECLARATIONS**

1 Point



woodura®
PATENTED SURFACE TECHNOLOGY



800.492.8722
UrbanSurfaces.com

BJELIN


Nadura Tile




GRADING: Tile

CLASS
34


Rated for Heavy-Duty
Commercial Use

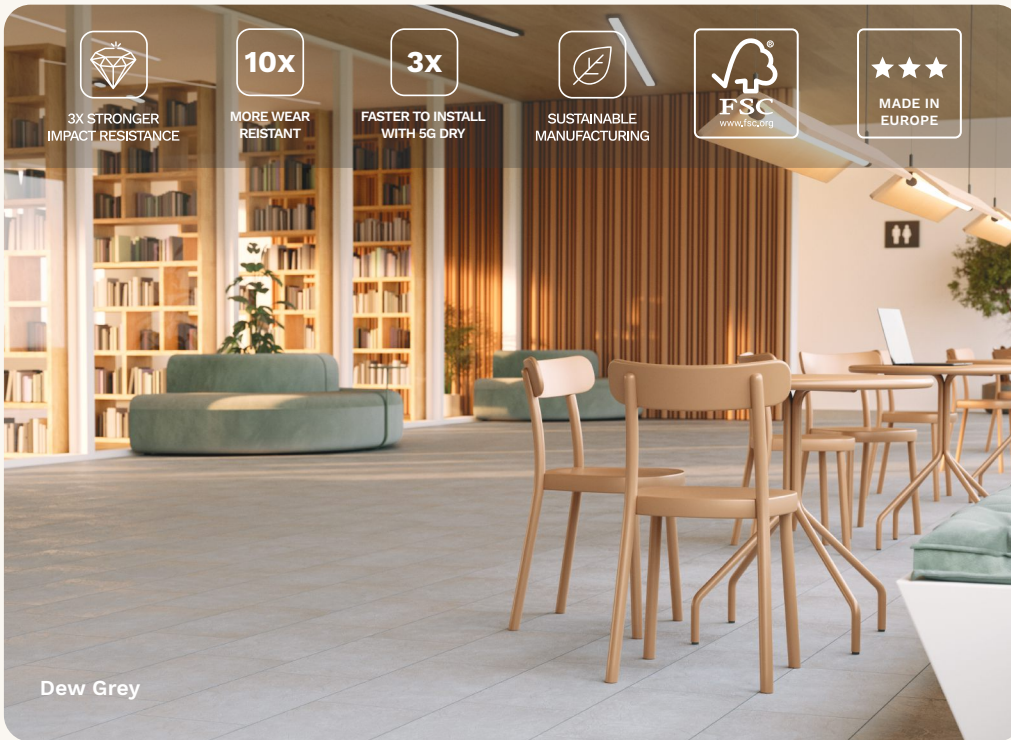

Dew Grey

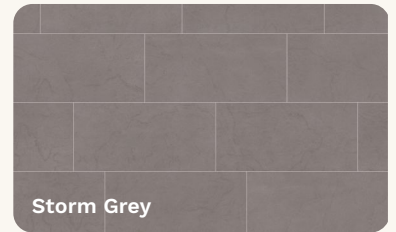

Storm Grey

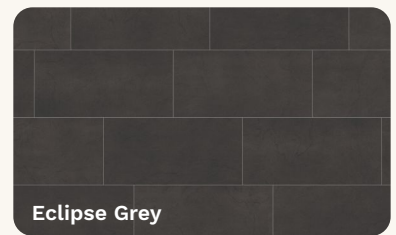

Eclipse Grey

PRODUCT DETAILS

PRODUCT Nadura Tile

STAINING COLORS 3

DIMENSIONS 11" x 22.9" x 10.5mm

GRADING Tile

BEVEL Decorative Groove

CORE Välinge Compositiek core

VENEER THICKNESS 0.4mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Soft Slate

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 8

AREA PER PACKAGE 13.99 sqft

WEIGHT OF PACKAGE 29.1 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.075 (m ² x K)/W
BRINELL HARDNESS	EN 1534	8 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<10%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM

EN ISO 10140-3
EN ISO 717-2

18-20 dB

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point

LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS

1 Point



800.492.8722
UrbanSurfaces.com