

PREMIUM MULTI-UNIT FLOORING

By Urban Surfaces

Flooring Collections











ALLOW US TO INTRODUCE OURSELVES

Urban Surfaces provides the multi-unit and builder markets with beautiful, innovative, and high-quality flooring products. We work with you to select materials, coordinate schedules, and do whatever it takes to deliver your order at just the right time.

With Urban Surfaces, you are not just another customer. We build our business around yours to keep your flooring selection in stock and ready to ship for the duration of your project.

There's a great reason some of the biggest national property management firms trust Urban Surfaces. We value partnership above all else, and we promise to reliably supply you with luxury vinyl flooring for projects of any size.

The most reliable authority in LVP and a trusted partner to builder and multi-unit spaces across the nation.



6 MIL

FOUNDATIONS
6MIL LVP GLUEDOWN FLOOR

BUILD UPON A STRONG FOUNDATION

6MIL SCRATCHGUARD WEAR LAYER
Effective Wear Protection

NATURAL WOOD TEXTURE
Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Newport Landing 1104

PURE QUALITY FOR ANY BUDGET

Foundations™ is a carefully crafted collection of high-end colors and patterns that will ensure you find the perfect fit for your design goals.

The Foundations™ collection features a wide variety of moldings and stair treads to give your projects a cohesive and polished style.

Core	**Pure Vinyl**
Plank Size	**7" x 48"**
Thickness	**1.6mm**
Wear Layer	**6mil ScratchGuard**
Edge Profile	**Square Edge**
Installation	**GlueDown**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

03 THREE YEARS
LIGHT COMMERCIAL

10 TEN YEARS
RESIDENTIAL

100% WATERPROOF

PET FRIENDLY

PREMIUM VISUALS

Construction

Enhanced Polyurethane System

6mil ScratchGuard Wear Layer


Natural Wood Texture

1.6mm Virgin Vinyl



PRISM
3010 | FIRM SET ADHESIVE

Perfectly Formulated For A Durable Installation And Easy Repairs

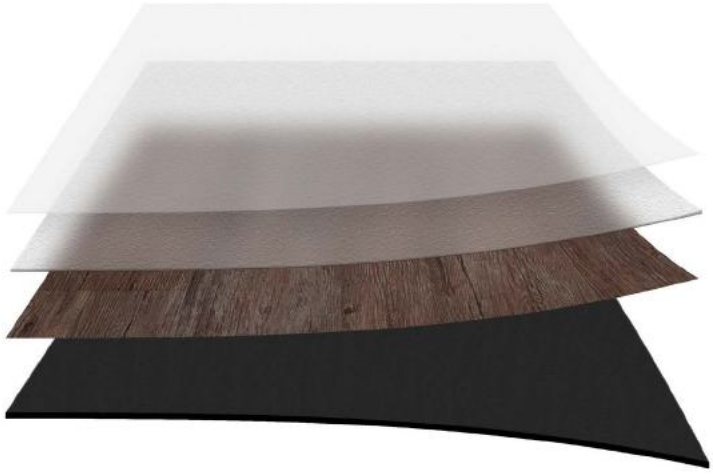



Mission Bay
1101



Carvins Cove
1102



Sonora Heights
1103



Newport Landing
1104



Hansen Creek
1105



Rochester Springs
1106



Balboa Trails
1107



Longview Point
1108



Carvins Cove 1102

8 MIL

MAIN|STREET
8MIL LVP GLUEDOWN FLOORING

DELIVERING LASTING VALUE TO THE HOME

8MIL SCRATCHGUARD WEAR LAYER
Effective Wear Protection

NATURAL WOOD TEXTURE
Ultra-Realistic Look
Focused Color Selection

SCAN FOR MORE INFO



Marquette 8061

NATURAL ELEGANCE FOR ANY RESIDENCE

Main Street™ features a modern and stylish high-definition film layer for a truly natural wood look. When it comes to affordable GlueDown LVP, Main Street™ is a cut above the competition. With a 100% waterproof construction and the perfect balance of performance plus design at compelling values, Main Street™ is the preferred choice for the multi-family and single-family markets.

Core	**Pure Vinyl**
Plank Size	**7" x 48"**
Thickness	**2mm**
Wear Layer	**8mil ScratchGuard**
Edge Profile	**Square**
Installation	**GlueDown**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

05 FIVE YEARS
LIGHT COMMERCIAL

15 FIFTEEN YEARS
RESIDENTIAL

100% WATERPROOF

PET FRIENDLY

EASY REPAIR

Construction

Enhanced Polyurethane System

8mil ScratchGuard Wear Layer

Natural Wood Texture

2mm Virgin Vinyl



PRISM
3010 | FIRM SET ADHESIVE

Perfectly Formulated For A Durable Installation And Easy Repairs





Twilight 8051



Briscoe
8123



Hudson
8071



Aspen
8070



Sierra
8060



Marquette
8061



Midland Grey
8050



Twilight
8051



Barn Owl
8122



Ash
8307



Presidio
8306

12 MIL

STUDIO 12
12MIL MULTI-FORMAT FLOORING

FINISH PROJECTS ON TIME AND UNDER BUDGET

12MIL SCRATCHGUARD WEAR LAYER
Extra Wear Protection

NATURAL WOOD TEXTURE
Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Berlin Terrace Floating 2914 | GlueDown 2114

FLOORING DESIGNED FOR MULTI-UNIT PROPERTIES

The Studio 12™ flooring collection is designed specifically with value in mind for multi-family projects. Studio 12™'s crossover colors enable you to put GlueDown flooring on the bottom floor and Floating Floor on the upper levels, completing the whole project seamlessly while saving money.

Warranties

10 TEN YEARS LIGHT COMMERCIAL

20 TWENTY YEARS RESIDENTIAL

Floating Floor

Core	**High-Density Solid Core**
Plank Size	**7" x 48"**
Thickness	**5mm**
Wear Layer	**12mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**Floating**
LEED Scorecard	**EQ 4.3 - 1 Point**


GlueDown

Core	**Pure Vinyl**
Plank Size	**7" x 48"**
Thickness	**2mm**
Wear Layer	**12mil ScratchGuard**
Edge Profile	**Square Edge**
Installation	**GlueDown**
LEED Scorecard	**EQ 4.3 - 1 Point**

Construction

Floating Floor Layers

Enhanced Polyurethane System
12mil ScratchGuard Wear Layer
Natural Wood Texture
4mm High-Density Solid Core
1mm Sound-Reducing Underlayment

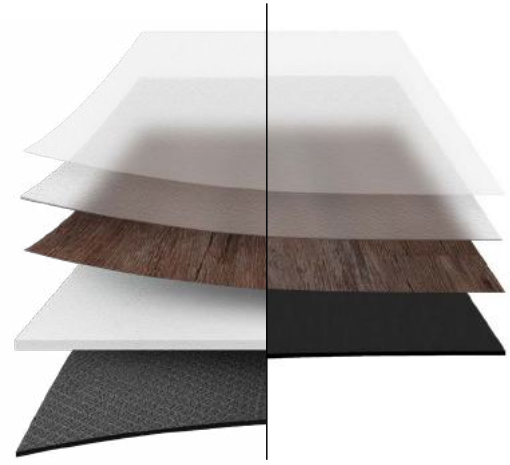

GlueDown Layers

Enhanced Polyurethane System
12mil ScratchGuard Wear Layer
Natural Wood Texture
2mm Virgin Vinyl



Pearl
Floating 2901
GlueDown 2101



Bristol Harbor
Floating 2907
GlueDown 2107



Whispering Pines
Floating 2908
GlueDown 2108



Bedford Creek
Floating 2910
GlueDown 2110



Sandpiper Spring
Floating 2909
GlueDown 2109



Arrowhead
Floating 2903
GlueDown 2103



Cobble Hill
Floating 2911
GlueDown 2111



Yosemite
Floating 2999
GlueDown 2199



Willow Run
Floating 2912
GlueDown 2112



Berlin Terrace
Floating 2914
GlueDown 2114



Chestnut
Floating 2906
GlueDown 2106



Hidden Acres
Floating 2913
GlueDown 2113



Whispering Pines Floating 2908 | GlueDown 2108

20 MIL

SOHO SQUARE
20MIL LVP GLUEDOWN FLOORING

EXCEPTIONAL PERFORMANCE FOR COMMERCIAL ENVIRONMENTS

20MIL SCRATCHGUARD WEAR LAYER
Commercial Wear Protection

NATURAL WOOD TEXTURE
Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Courtland Alley 7528

AT THE INTERSECTION OF ART AND INDUSTRY

SoHo Square™ offers a modern-day solution for commercial applications by providing the natural look of wood. Both stylish and highly resistant to walk-through, it makes projects that were once impossible into a reality.

Core	**Pure Vinyl**
Plank Size	**7" x 48"**
Thickness	**3mm**
Wear Layer	**20mil ScratchGuard**
Edge Profile	**Square Edge**
Installation	**GlueDown**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

TWENTY YEARS LIGHT COMMERCIAL

FIFTEEN YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL

100% WATERPROOF

HIGH TRAFFIC

EASY REPAIR

Construction

Enhanced Polyurethane System

20mil ScratchGuard Wear Layer


Natural Wood Texture

3mm Virgin Vinyl



EVERLAST
3020 | HARD SET ADHESIVE

Ultra-strong Bond For Long Lasting Commercial Flooring

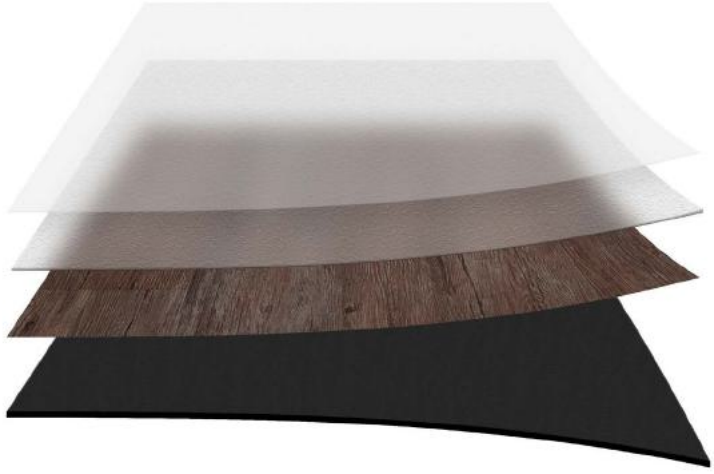



Boardwalk 7503



Canal Street
7501



Sixth Avenue
7527



Charlton Plaza
7526



Sullivan Street
7502



Wooster Street
7505



Dakota Way
7509



Sedona Bridge
7508



Crosby Street
7507



Boardwalk
7503



West Broadway
7524



Waverly Place
7504



Courtland Alley
7528

20 MIL

SOUND-TEC
20MIL SPC FLOORING

FOREVER WATERPROOF & SOUND REDUCING

20MIL SCRATCHGUARD WEAR LAYER
Commercial Wear Protection

CERAMIC BEAD SCRATCH ARMOR
Extra Protection
Against Scratches

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Sedona Bridge 9508

UNPARALLELED NOISE REDUCTION

Sound-Tec™, the original sound-reducing floor, continues to outpace the competition with its impressive quality. Sound-Tec™ floors include antimicrobial coatings above and below to protect against harmful mold and mildew.

Core	**4.5mm High-Density Solid Core**
Plank Size	**7" x 48"**
Thickness	**6mm**
Wear Layer	**20mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**Floating**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

20 TWENTY YEARS LIGHT COMMERCIAL

15 FIFTEEN YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL


100% WATERPROOF

PET FRIENDLY

ANTI MICROBIAL

Construction

- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

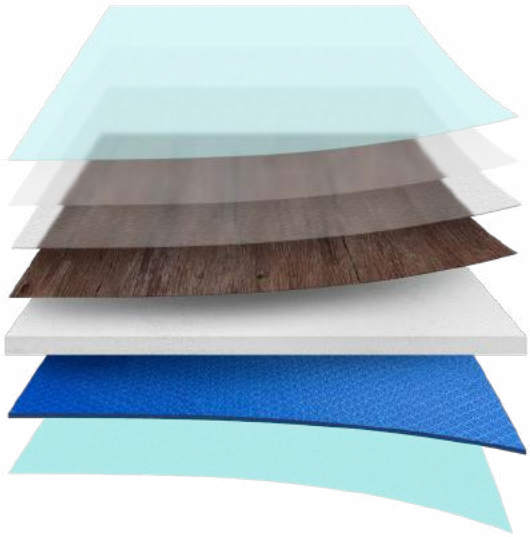

Proudly Partnered With
Veneklasen Associates

The First and Still the Best Authority on Acoustics.



Sixth Avenue
9527



Pembroke
9511



Caspian Heights
9520



Charlton Plaza
9526



Navajo
9563



Astoria
9521



Yosemite
9599



Boardwalk
9503



Dakota Way
9509



Cheyenne
9553



Sedona Bridge
9508



Avondale
9529



Monterey
9510



Kodiak
9537



West Broadway
9524



Cambridge
9523



Midland Grey
9525



Twilight
9505



Stormy Sky
9557



La Jolla
9516



Alamo
9538



Courtland Alley
9528



Midnight Grey
9573



Fairbanks
9534

20 MIL

SOUND-TEC PLUS
20MIL SPC FLOORING

NATURALLY STUNNING FLOORS FOR THE MODERN HOME

20MIL SCRATCHGUARD WEAR LAYER
Commercial Wear Protection

CERAMIC BEAD SCRATCH ARMOR
Extra Protection
Against Scratches

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Mesa Verde 9714

MORE BEAUTY PER PLANK

The larger format of Sound-Tec Plus™ has captured a lot of attention with naturally pristine visuals inspired by the world's most breathtaking destinations. Take a moment to enjoy the luxurious options in this expansive product line containing authentic wood styles ranging from rustic to modern.

Core	**4.5mm High-Density Solid Core**
Plank Size	**9" x 60"**
Thickness	**6mm**
Wear Layer	**20mil ScratchGuard**
Edge Profile	**Painted Beveled Edge**
Installation	**Floating**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

20 TWENTY YEARS LIGHT COMMERCIAL

15 FIFTEEN YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL


100% WATERPROOF

PET FRIENDLY

ANTI MICROBIAL

Construction

- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

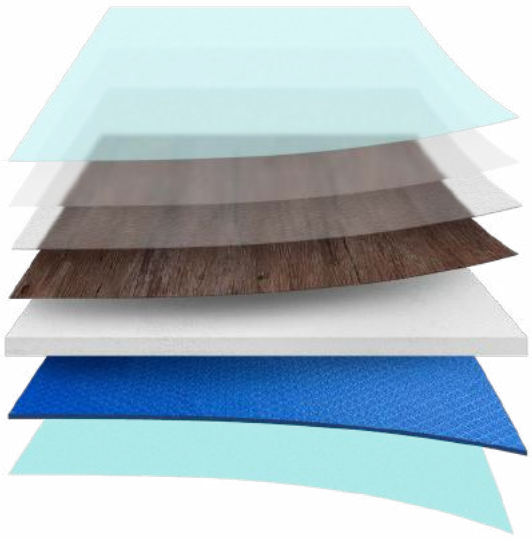

Proudly Partnered With
Veneklasen Associates

The First and Still the Best Authority on Acoustics.



Joshua Tree 9713



Biscayne Bay
9711



Mesa Verde
9714



Joshua Tree
9713



Mount Rainier
9707



Pinnacle Grove
9715



Mount Olympia
9712



Yellowstone
9706



Acadia
9704

20 MIL

SOUND-TEC TILE
20MIL SPC FLOORING

ROCK SOLID, LONG LASTING STONE LOOKS

20MIL SCRATCHGUARD WEAR LAYER
Commercial Wear Protection

REALISTIC STONE LOOK
Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM
Highly Stain Resistant

SCAN FOR MORE INFO



Obsidian 9603

ROCK-SOLID FLOORS WITH UNPARALLELED NOISE REDUCTION

With its angle-drop installation, Sound-Tec Tile™ is a step forward in every way featuring stunning beauty, sound reduction, and durability. Gone is the hassle of ceramic flooring. Tile has never been this quick and easy.

Core	**4.5mm High-Density Solid Core**
Plank Size	**12" x 24"**
Thickness	**6mm**
Wear Layer	**20mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**Floating**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

TWENTY YEARS LIGHT COMMERCIAL

FIFTEEN YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL


100% WATERPROOF

PET FRIENDLY

ANTI MICROBIAL

Construction

- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Stone Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

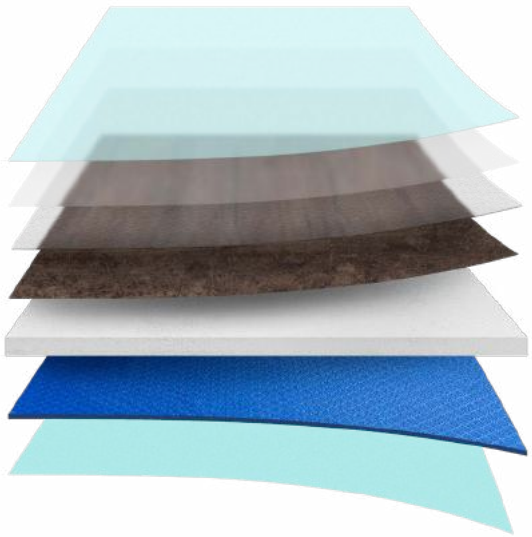

Proudly Partnered With Veneklasen Associates

The First and Still the Best Authority on Acoustics.



Electra
9609



Vega
9610



Astella
9608



Solstice
9606



Nova
9607



Luna
9605



Meteor
9604



Obsidian
9603



Meteor 9604

20 MIL

INSTAGRIP 20
20MIL LOOSELAY FLOORING

EXPERTLY ENGINEERED FOR UNRIVALED PERFORMANCE

20MIL SCRATCHGUARD WEAR LAYER
Excellent Wear Protection
Deflects Damage

INSTALL OPTIONS
Traction Subfloor Coating
Full-Spread Adhesive

EXACT-MATCH STAIR NOSE
Available for Every Design

SCAN FOR MORE INFO



Asbury 1201

FIBERGLASS REINFORCED

InstaGrip 20™ is our streamlined LooseLay vinyl flooring with a 20mil ScratchGuard wear layer and a 4.5mm pure vinyl core. Whether it is a residential or commercial space, the FiberMax fiberglass reinforcement and Grip-Tec backing ensure a steadfast installation that lasts.

Core	**4.5mm Virgin Vinyl**
Plank Size	**9" x 60"**
Thickness	**4.5mm**
Wear Layer	**20mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**LooseLay**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

TWENTY YEARS LIGHT COMMERCIAL

FIFTEEN YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL

100% WATERPROOF

PET FRIENDLY

FIBERMAX REINFORCED

Construction

- Enhanced Polyurethane System
- 20mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4.5mm Virgin Vinyl
- Fiberglass Stabilization Layer
- Grip-Tec Backing



TRACTION
3545 | SUBFLOOR GRIP COATING

Meet The Revolutionary Alternative To Glue





Lighthouse
1206



Cape Cod
1202



Asbury
1201



Sandbridge
1203



Yosemite
1299



Scarborough
1204



Sagamore Hill
1205



West Broadway
1224



Scarborough 1204

28 MIL

INSTAGRIP 28
28MIL LOOSELAY FLOORING

LESS WORK, LESS TIME, MORE PEACE OF MIND

28MIL SCRATCHGUARD WEAR LAYER
Excellent Wear Protection
Deflects Damage

INSTALL OPTIONS
Traction Subfloor Coating
Full-Spread Adhesive

EXACT-MATCH STAIR NOSE
Available for Every Design

SCAN FOR MORE INFO



Pismo 1003

LOOSELAY PERFECTED BEYOND MEASURE

InstaGrip 28™ LooseLay vinyl flooring is quick to install and features heavy-duty, commercial-grade FiberMax durability. The 28mil wear layer stands up to heavy foot traffic and rolling loads while the Grip-Tec backing secures the planks to the floor.

Core	**5mm Virgin Vinyl**
Plank Size	**9" x 48"**
Thickness	**5mm**
Wear Layer	**28mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**LooseLay**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

LIFE TIME
LIGHT COMMERCIAL

20 TWENTY YEARS
HEAVY COMMERCIAL

LIFE TIME
RESIDENTIAL

100% WATERPROOF

PET FRIENDLY

FIBERMAX REINFORCED

Construction

- Enhanced Polyurethane System
- 28mil ScratchGuard Wear Layer
- Natural Wood Texture
- 5mm Virgin Vinyl
- Fiberglass Stabilization Layer
- Grip-Tec Backing



TRACTION
3545 | SUBFLOOR GRIP COATING

Meet The Revolutionary Alternative To Glue





Laguna
1007



Hollister
1005



Pismo
1003



Avalon
1002



Doheny
1008



Coronado
1004



Moonstone
1001



Woods Cove
1006



Avalon 1002

28 MIL

INSTAGRIP 28 TILE

28MIL LOOSELAY FLOORING

INDUSTRIAL BEAUTY IN GRAND PROPORTIONS

LARGE 36" X 36" TILE FORMAT
Impressive Flooring Dimensions
for Premium Elegance

STONE TILE AESTHETIC
Sophisticated Industrial Look
Ultra-Realistic Style
Tactile Stone Feel

EXACT-MATCH STAIR NOSE
Available for Every Design

SCAN FOR MORE INFO



Stratus 1030

A STUNNING 36" x 36" STATEMENT

InstaGrip 28 Tile™ is LooseLay vinyl flooring with an industrial and premium 36" x 36" aesthetic. This FiberMax-reinforced, Grip-Tec-backed tile features highly durable, 5mm vinyl construction with a concrete appearance, smooth topography, and large dimensions.

Core	**5mm Virgin Vinyl**
Plank Size	**36" x 36"**
Thickness	**5mm**
Wear Layer	**28mil ScratchGuard**
Edge Profile	**Beveled Edge**
Installation	**LooseLay**
LEED Scorecard	**EQ 4.3 - 1 Point**

Warranties

LIFE TIME LIGHT COMMERCIAL

20 TWENTY YEARS HEAVY COMMERCIAL

LIFE TIME RESIDENTIAL

100% WATERPROOF

36" x 36" TILES

FIBERMAX REINFORCED


Construction


- Enhanced Polyurethane System
- 28mil ScratchGuard Wear Layer
- Natural Stone Texture
- 5mm Virgin Vinyl
- Fiberglass Stabilization Layer
- Grip-Tec Backing



TRACTION
3545 | SUBFLOOR GRIP COATING

Meet The Revolutionary Alternative To Glue

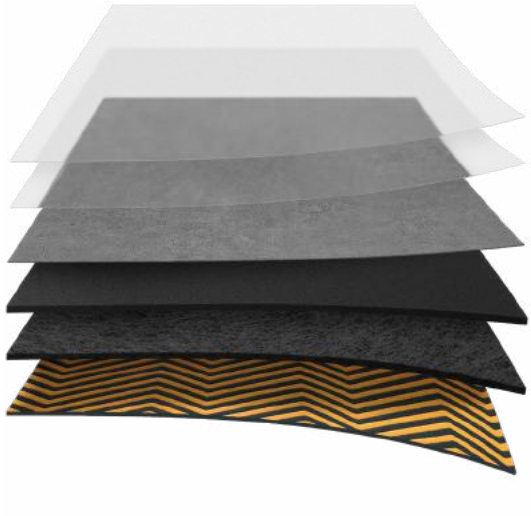

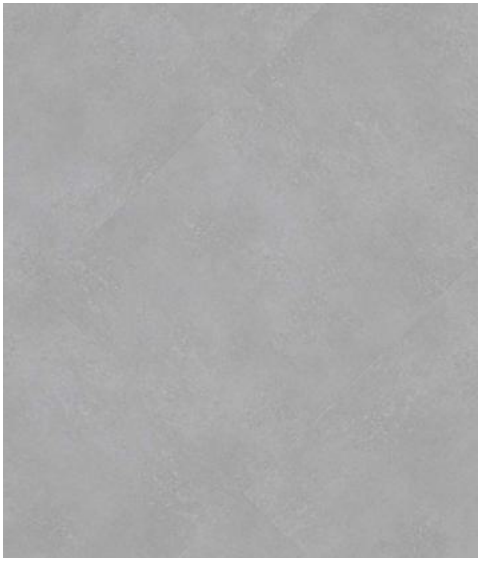


Stratus
1030



Cloudburst
1031




Aurora
1032

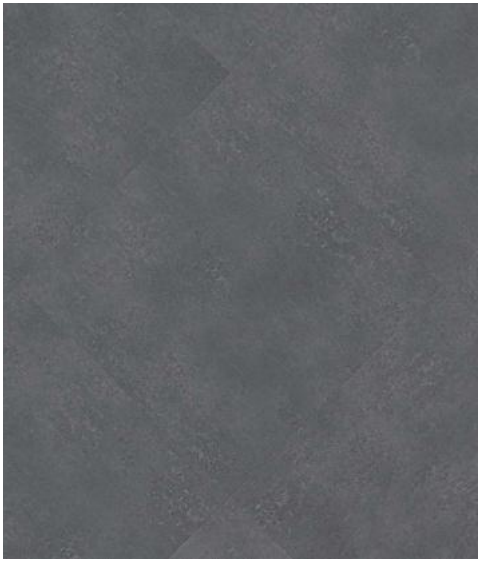

Landfall
1033



Thunderhead
1034

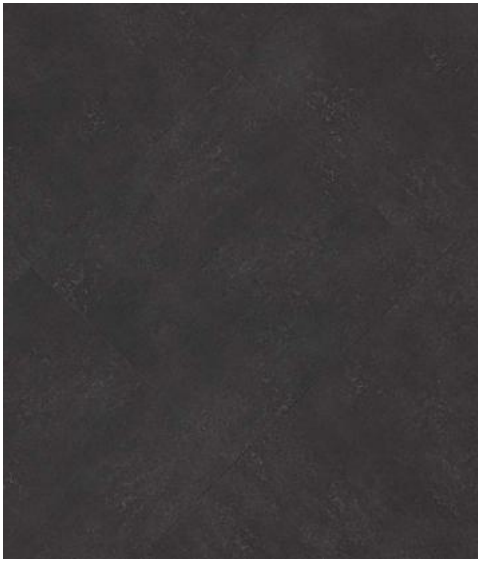

Eclipse
1035



Aurora 1032

INSTALLATION PERFECTION EVERY TIME WITH URBAN ESSENTIALS

ADHESIVE PRODUCTS



PRISM
3010 | FIRM SET ADHESIVE

Bonds subfloor to GlueDown LVP for light-traffic conditions. Make sure to use the proper trowel based on porosity and primer usage.

Coverage:
150-260 sqft per gallon



EVERLAST
3020 | HARD-SET ADHESIVE

Bonds subfloor to GlueDown LVP for light-traffic and commercial applications. Make sure to use the proper trowel based on porosity and primer usage.

Coverage:
150-260 sqft per gallon



OMNI
3050 | ADHESIVE & MOISTURE BARRIER

Does it all in one step. Commercial-grade adhesive for GlueDown LVP, primer, and unlimited moisture protection. No moisture testing required.

Coverage:
180-250 sqft per gallon



ASCEND
3080 | WALL ADHESIVE

Adhesive for application of LVP to vertical surfaces. Create a beautifully unique look for walls by using 2mm or thinner flooring.

Coverage:
250-300 sqft per gallon



STRONGHOLD
3070 | MOLDING & STAIR TREAD ADHESIVE

Ensures that moldings stay put. High-strength, flexibly bonded, and resistant to high alkalinity. Comes in tube for use with a caulking gun.

URBAN ESSENTIALS
FROM START TO FINISH

SCAN FOR ALL URBAN ESSENTIALS PRODUCTS

SUBFLOOR-COATING PRODUCTS



TRACTION

3545 | SUBFLOOR GRIP COATING

Fast and easy LooseLay installation. Not an adhesive. Provides horizontal grip, priming, and up to 90% moisture protection. Easily replace planks by hand if repairs are ever needed.

Coverage:
1 Coat: 350 sqft per gallon
2 Coats: 200 sqft per gallon



TRILOGY

3525 | MULTIPURPOSE PRIMER

Primes for an effective adhesive bond and protects against alkali attack. Provides encapsulation or up to 95% moisture protection (not simultaneously).

Coverage:
1 Coat: 350 sqft per gallon
2 Coats: 200 sqft per gallon



INFUSE

3515 | ENCAPSULATOR & PRIMER

Encapsulates adhesive residue, including cutback, and primes for an effective bond to subfloor. Protects against alkali attack. Apply after any needed moisture protection.

Coverage:
250 sqft per gallon



ADVANTAGE

3505 | SUBFLOOR PRIMER

Primes for an effective adhesive bond to subfloor. Protects against alkali attack. Apply after appropriate moisture protection.

Coverage:
300-450 sqft per gallon



INFINITI

3535 | MOISTURE PROTECTION

Provides 100% moisture protection, no testing required. Before applying adhesive, use Infuse™ Encapsulator & primer.


Coverage:
90-120 sqft per gallon

FLOOR SILENCER *Underlayments*

SOUND REDUCTION

MOISTURE PROTECTION

ANTIMICROBIAL DEFENSE




Boost

FloorSilencer Boost™ – *4′ x 6′ Panel, 6mm (¼") Thickness*

Provides the benefits of sound reduction, thermal insulation, antimicrobial moisture protection, subfloor-imperfection smoothing, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity. Innovative fiberboards, made from quality, eco-friendly recycled materials. Dense and durable while still being cuttable to shape.

Compatibility

Floating Floor	✓ 4mm+



Flex

FloorSilencer Flex™ – *6′ x 60′ Roll, 1.4mm Thickness*

The ground-breaking design and technology of these rolls provide unparalleled underlayment efficiency with the benefits of sound reduction, thermal insulation, antimicrobial moisture protection, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity. The thin but effective construction makes FloorSilencer Flex™ a quick, easy, and affordable solution.

Compatibility

Floating Floor	✓ 4mm+



Pro

FloorSilencer Pro™ – *3′ x 33.4′ Roll, 1.25mm Thickness*

These underlayment rolls are remarkably easy and versatile, featuring compatibility with every single one of our flooring types. FloorSilencer Pro™ adeptly provides noise reduction, moisture protection, antimicrobial defense, and thermal insulation. It is the ideal underlayment for projects that use very thin flooring or a variety of flooring types.

Compatibility

Floating Floor	✓ 4mm+
GlueDown	✓ 1.6mm+

THE FIRST AND STILL THE BEST AUTHORITY ON ACOUSTICS

Veneklasen Associates, Keeping Noise Under Control

Having earned degrees in physics and mathematics from UCLA, Paul S. Veneklasen founded Veneklasen Associates in 1947 to put his acoustical physics knowledge to work. Veneklasen became an important consultant to government agencies such as the US Air Force, contributing to improved helmet designs and jet-noise suppression. He also contributed to the private sector, providing innovative solutions for acoustic testing that are still in use today.

Veneklasen Associates was the world's first acoustical consulting firm ever founded. Since the beginning, they have treated sound as what it is: a science to be studied inside and out. Understanding the physics of audio has been crucial to them from the start, leading to vital advancements in the measurement, control, and use of sound worldwide.

Badge of Honor

We proudly feature the Veneklasen Associates badge on our packaging. Regardless of which of our floorings you choose, when you see the Veneklasen Associates badge, you can rest assured that you're getting an accurate sound rating.

You don't have to be an acoustical physicist to know how important a quiet environment can be for both work and home. We did the hard part so you can order confidently, knowing you're getting not just a great flooring but a quiet one.

Veneklasen Associates

Exact-Match Moldings

Our moldings provide clean and beautiful transitions with exact matches for every one of our Floating Floor designs. These highly wear-resistant and 100% waterproof moldings are robustly built to blend.



End Cap
94”

End Caps are used in a number of different applications, especially when ending runs against vertical surfaces.



2-in-1 Slim Trim (SLT)
94"

Works as a Reducer, but also serves as a T-Molding when connecting even surfaces.



Low Profile End Cap
94"

Low Profile is perfect for areas where no base molding can be installed (such as bathtubs).



T-Molding
94"

Bridges two surfaces of equal height. The low-profile look makes a beautiful transition.



Quarter Round
96"

So quick and easy that baseboards don’t even need to be removed in order to install.



Reducer
94"

Where flooring of different heights meet, the Reducer adds a gentle slope between.




Premium Stair Finishing

Urban Surfaces' stair-finishing products provide stylish and durable stair solutions with exact-match designs.



InstaGrip Stair Nose
94"

This broad and beautiful stair nose installs flush and gives your install a stylish appearance.



White SPC Stair Riser
7 ¼" x 48"

Pairs perfectly with our stair treads. White SPC with a 3mil wear layer and UV protection.



Square Edge Stair Nose
94"

For that modern Square Edge look, with a more classical installation and approach.



Square Edge Stair Tread
11 ¾" x 51 ⅝"

Installs quickly and provides a perfect finish every time. Put an end to on-site retrofitting.



Metal Stair Nose
96"

When floating floors require a more contemporary approach.




Stair Nose
94"


This classic nosing can be installed flush or overlapping, depending on the desired finish.



Molding Type	ST Sound-Tec	STP Sound-Tec Plus	STT Sound-Tec Tile	S12 Studio 12	FF Foundations	IG InstaGrip
 Slim Trim (SLT)	✓	✓	✓	✓	✓	
 Low Profile End Cap	✓	✓	✓			
 Reducer	✓	✓	✓	✓	✓	
 End Cap	✓	✓	✓	✓	✓	
 T-Molding	✓	✓	✓	✓	✓	
 Stair Nose	✓	✓		✓	✓	
 Quarter Round				✓	✓	
 Metal Stair Nose	✓	✓	✓			
 InstaGrip Stair Nose						✓
 Square Edge Stair Tread	✓	✓		✓	✓	
 Square Edge Stair Nose	✓	✓		✓	✓	

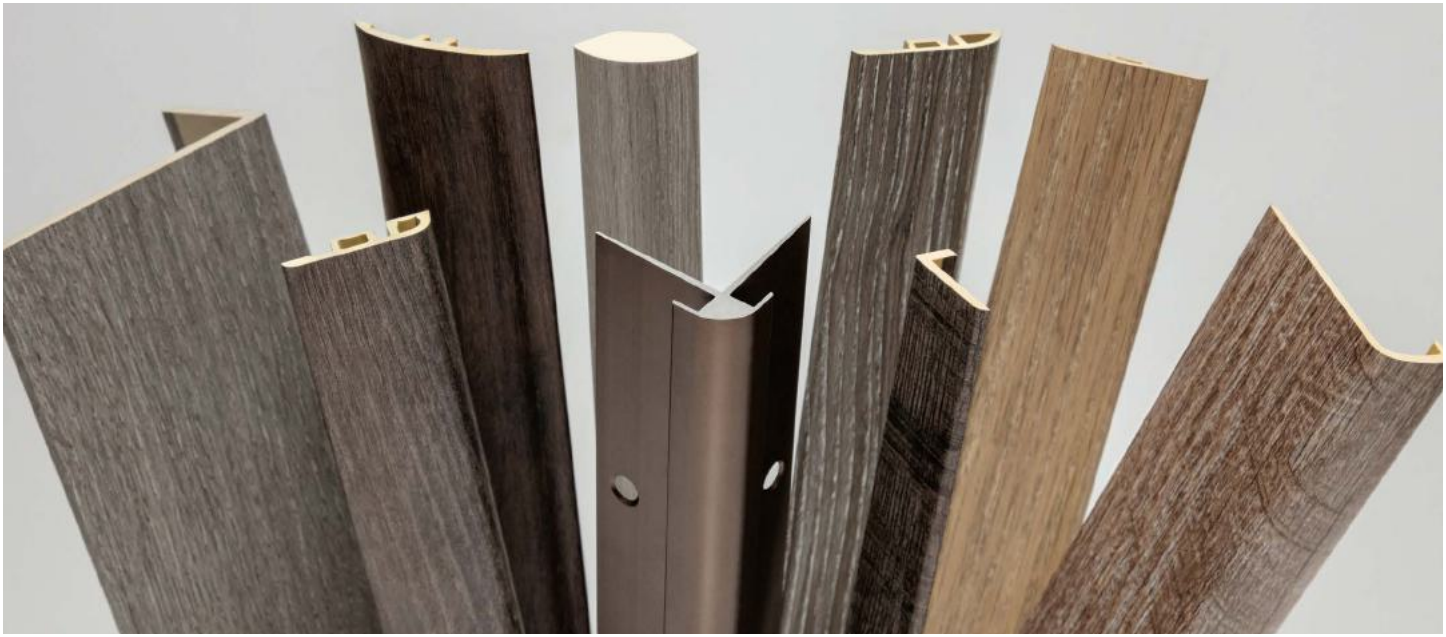

Where beauty meets function.

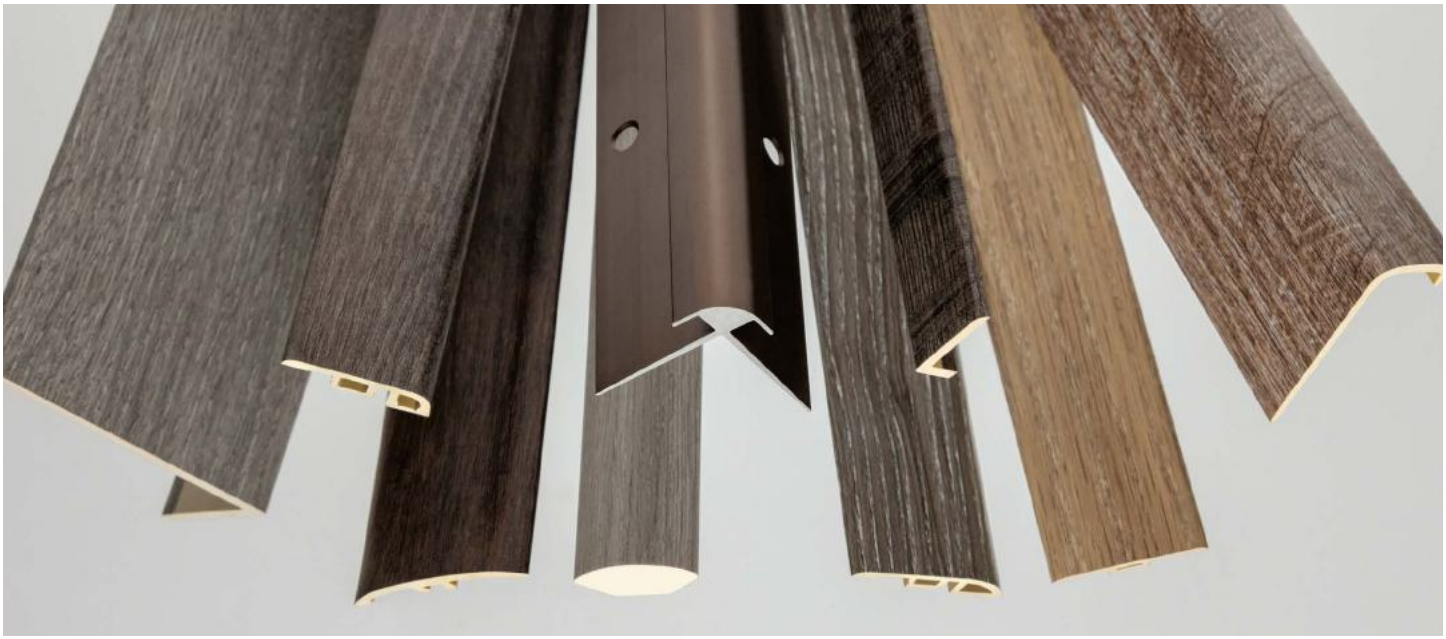



WHY HARD SURFACE FLOORING?

Hard-surface floors are easy to clean and maintain because they provide a one-dimensional surface that doesn't absorb odors, spills, dust, or soil. They also don't retain moisture, which can lead to the growth of microorganisms, such as dust mites and mold.



What Are You Breathing?

Research by the RFCI shows that, on average, a person will spend 90% of their life indoors. Whether it be in your working environment, your home, or sitting in a movie theater, you will spend a majority of your time inside. When this is realized, you may want to know how healthy the air quality is, and rightly so. A recent study done by the Environmental Protection Agency (EPA) found that indoor air was deemed two to five times more harmful than outdoor air. This is due to many harmful pollutants that may be found indoors, including radon, mold, and carbon dioxide.

Healthy air contributes to better learning in schools, improved productivity in offices, and more comfortable homes. Poor indoor air quality (IAQ) can be a factor in a variety of health problems, such as headaches, dizziness, and more serious long-term effects.

WHY FLOORSCORE?

When it comes to indoor air quality, a primary concern is the emission level of specific volatile organic compounds (VOCs).

Hundreds of resilient flooring materials and their adhesives bear the FloorScore® seal. This seal tells you that the products have been independently certified by SCS to comply with the volatile organic compound emissions criteria of the California Section 01350 standard. Any product that has met these stringent standards is a product that will contribute to good IAQ.


FloorScore Requirements

To earn the FloorScore® seal, a flooring product must satisfy the requirements of the SCS-EC-10.2-2007 Environmental Certification Program – Indoor Air Quality Performance.

Which Includes:

Testing demonstrating compliance with emission concentrations for listed VOCs under California Section 01350

- Manufacturing facility on-site audits and yearly surveillance audits
- Annual product re-testing
- Product record keeping
- A documented quality control plan

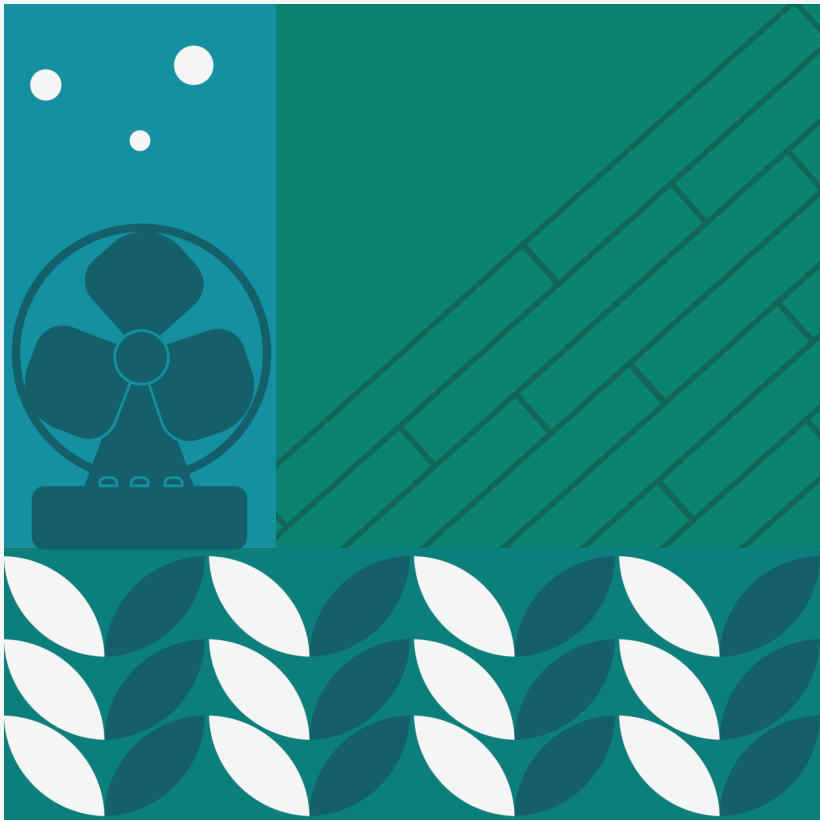

Sound Test Scores

Sound-Tec

	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC
Sound Testing Wood Assembly	63	43	52	-	-	60
Sound Testing 6" Concrete	59	70	57	24	28	51
Sound Testing 6" Concrete with Insulation & Drywall	69	69	64	-	-	61
Sound Testing 8" Concrete	61	75	58	-	-	55

Sound-Tec with Floor Silencer Flex

	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC
Sound Testing Wood Assembly	71	44	52	-	-	59
Sound Testing 6" Concrete	66	70	58	25	35	51
Sound Testing 6" Concrete with Insulation & Drywall	77	71	66	-	-	60
Sound Testing 8" Concrete	68	77	59	-	-	55

Sound-Tec with Floor Silencer Boost

	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC
Sound Testing Wood Assembly	73	46	55	-	-	60
Sound Testing 6" Concrete	72	70	54	24	41	53
Sound Testing 6" Concrete with Insulation & Drywall	78	73	66	-	-	61
Sound Testing 8" Concrete	71	75	57	-	-	56

FOUNDATIONS
6MIL LVP GLUEDOWN FLOOR

SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	6mil
Edge	Square Edge
Overall Thickness	1.6mm - 0.063"
Nominal Size	7" x 48"
Actual Size	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System
Installation	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1
Static Load / ASTM F970	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes
Light Resistance: ASTM F1515	Passes
Heat Resistance / ASTM F1514	Passes
Chemical Resistance / ASTMF925	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals: ASTM F963	Passes
Formaldehyde: ASTM D6007	Passes
Sound Testing	N/A
FloorScore Certified: California 01350	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point

DOWNLOAD
SPEC SHEET

	MAIN STREET 8MIL LVP GLUEDOWN FLOORING	SOHO SQUARE 20MIL LVP GLUEDOWN FLOORING
SPECIFICATIONS		
Construction	Luxury Vinyl Plank (LVP)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	8mil	20mil
Edge	Square Edge	Square Edge
Overall Thickness	2mm - 0.079"	3mm - 0.118"
Nominal Size	7" x 48"	7" x 48"
Actual Size	177.8mm x 1219.2mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	GlueDown	GlueDown
PERFORMANCE TESTING		
Slip Resistance / ASTM D2047	≥0.6 (Dry)	≥0.69 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .005" Residual Compression	2,000Psi .011" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTMF925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

SPECIFICATIONS	STUDIO 12 12MIL SPC FLOATING FLOOR	STUDIO 12 12MIL LVP GLUEDOWN FLOOR
Construction	Stone Polymer Composite (SPC)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	12mil	12mil
Edge	Beveled	Square Edge
Overall Thickness	5mm - 0.196"	2mm - 0.079"
Nominal Size	7" x 48"	7" x 48"
Actual Size	182mm x 1220mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	Floating	GlueDown
PERFORMANCE TESTING		
Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011" Residual Compression	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTMF925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
Sound Testing	HIIC 71 | ΔHIIC 30 IIC 64 | ΔIIC 25 STC 61 | LIIC 75	N/A
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

	SOUND-TEC 20MIL SPC FLOORING	SOUND-TEC PLUS 20MIL SPC FLOORING	SOUND-TEC TILE 20MIL SPC FLOORING
SPECIFICATIONS			
Construction	Stone Polymer Composite (SPC)	SPC	SPC
Wear Layer Thickness	20mil	20mil	20mil
Edge	Beveled	Painted Bevel	Beveled
Overall Thickness	6mm - 0.236"	6mm - 0.236"	6mm - 0.236"
Nominal Size	7" x 48"	9" x 60"	12" x 24"
Actual Size	182mm x 1220mm	230mm x 1524mm	305mm x 609mm
Installation	Floating	Floating	Floating
Finish	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead
PERFORMANCE TESTING			
Slip Resistance / ASTM D2047	≥0.52 (Dry)	≥0.52 (Dry)	≥0.52 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .036" Residual Compression		
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTMF925	Passes	Passes	Passes
Phthalates: ASTM F3414-20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes
Sound Testing	HIIC 69 | ΔHIIC 28 IIC 64 | ΔIIC 24 STC 61 | LIIC 75	HIIC 69 | ΔHIIC 28 IIC 64 | ΔIIC 24 STC 61 | LIIC 75	HIIC 69 | ΔHIIC 28 IIC 64 | ΔIIC 24 STC 61 | LIIC 75
FloorScore Certified: California 01350	Passes	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3- 1 Point

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

SPECIFICATIONS	INSTAGRIP20 20MIL LOOSELAY FLOORING	INSTAGRIP28 28MIL LOOSELAY FLOORING	INSTAGRIP28TILE 28MIL LOOSELAY FLOORING
Construction	Luxury Vinyl Plank (LVP)	LVP	LVP
Wear Layer Thickness	20mil	28mil	28mil
Edge	Beveled	Beveled	Beveled
Overall Thickness	4.5mm - 0.177"	5mm - 0.196"	5mm - 0.196"
Nominal Size	9" x 60"	9" x 48"	36" x 36"
Actual Size	228.6mm x 1524mm	228.6mm x 1219.2mm	914.4mm x 914.4mm
Installation	Traction / Adhesive	Traction / Adhesive	Traction / Adhesive
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System	Enhanced Polyurethane System
PERFORMANCE TESTING			
Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.8 (Dry)	≥0.8 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011"	2,000Psi .008"	2,000Psi .008"
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTMF925	Passes	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes
Sound Testing	HIIC Pending | ΔHIIC Pending IIC Pending | ΔIIC Pending STC Pending | LIIC Pending	HIIC Pending | ΔHIIC Pending IIC 48 | ΔIIC 11 STC 61 | LIIC Pending	HIIC Pending | ΔHIIC Pending IIC 48 | ΔIIC 11 STC 61 | LIIC Pending
FloorScore Certified: California 01350	Passes	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3- 1 Point

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

DOWNLOAD SPEC SHEET

THE REFRESHINGLY DIFFERENT FLOORING COMPANY

URBAN SURFACES
800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the U.S.A.