


URBAN
SURFACES


SOUND-TEC

20MIL SPC FLOORING


20
MIL




Boardwalk
9503




Twilight
9505




Dakota Way
9509




Monterey
9510




Caspian Heights
9520




Astoria
9521



Cambridge
9523




West Broadway
9524



Midland Grey
9525



Charlton Plaza
9526



Sixth Avenue
9527




Courtland Alley
9528



Urban Surfaces' Signature Collection features our most sought-after flooring designs, carefully selected from across our diverse lines. Choosing from the Signature Collection means investing in flooring that has proven its timeless appeal—not only through unmatched durability but also enduring style.



Avondale
9529



Fairbanks
9534



Alamo
9538




Cheyenne
9553



Navajo
9563



Yosemite
9599

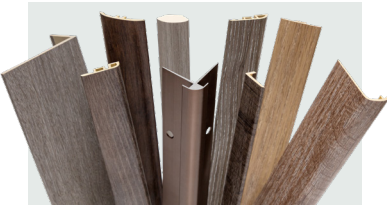

EXACT-MATCH MOLDINGS

We are proud to provide robustly built, exact-match moldings and stair-finishing options for all of our Floating Floor lines. While other manufacturers only offer “coordinated” colors, our moldings blend perfectly.

YOU DIDN'T HEAR IT FROM US



69

HIIC

69

LIIC

64

IIC

24

Δ IIC

28

Δ HIIC

61

STC

Urban Surfaces is at the cutting edge of noise-reduction technology in multi-unit spaces. With scores like these, noise complaints will be a thing of the past.

Sound Testing By
Veneklasen Associates



For even better scores, choose one of our innovative FloorSilencer underlayments.

WATERPROOF FLOORS WITH UNPARALLELED NOISE REDUCTION



Specifications	Floating Floor
Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

Testing	
Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI .036"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE
SOUND-TEC
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA